
# **TECHNICAL DATA**

## Edges

**Product description and Technical Specification** 

Edge with joint for the delimitation of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1000 mm, height ... mm, thickness ... mm.

- Protection upon impact
- Easy installation and maintenance, non-toxic
- High durability in time

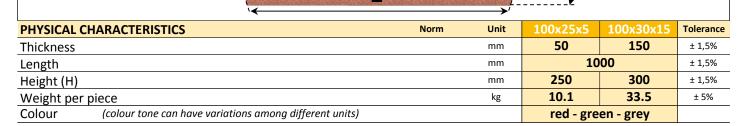

5

PHYSICAL AND CHEMICAL PROPERTIES	Norm	Unit	100x25x5	100x30x15	
Fire resistance	EN 13501-1		Efl, E		
Temperature tolerance			- 40° C ;	; + 80° C	

#### **PACKING AND STORING**

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to avoid possible water penetration.

#### WARNINGS

Make sure all the pieces have the same temperature during the entire installation period. Lay down the edges 24 hours before the installation to allow them to get their original dimensions.

Install all the edges in a single laying session in order to guarantee installation under similar conditions.

### **INFLUENCE FROM ATMOSPHERIC CONDITIONS**

In order to get the idea application environmental conditions the temperature of the application site7place have to be above 4°C for at least 24 hours before the pads application. If the site application has temperature below to 4°C, please keep the pads stored for at leat 72 hours befor the installation at a temperature above 10°C.


Do not install the pads on sites where the temperature is below at 4°C for long time. The pads have to be stored and installed on shadow in order to avoid pads overheating.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved

PRG-MOD. 15 REV 0 25/06/2014 ENG

Isolgomma Srl, Via dell'Artigianato Z.I., 36020 Albettone (VI), tel. 0444790781, fax 0444790784, tecservice@isolgomma.com, www.isolgomma.com

**ISO**GOMMA



ISOIGOMM



