



# TECHNICAL DATA

## Edge L


### Edges

#### Product description and Technical Specification

L-shaped Edge for protection of low walls at perimeter of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1000 mm, height 150 mm, width 400 mm, thickness 50 mm.



- Protection upon impact
- Easy installation and maintenance, non-toxic
- High durability in time

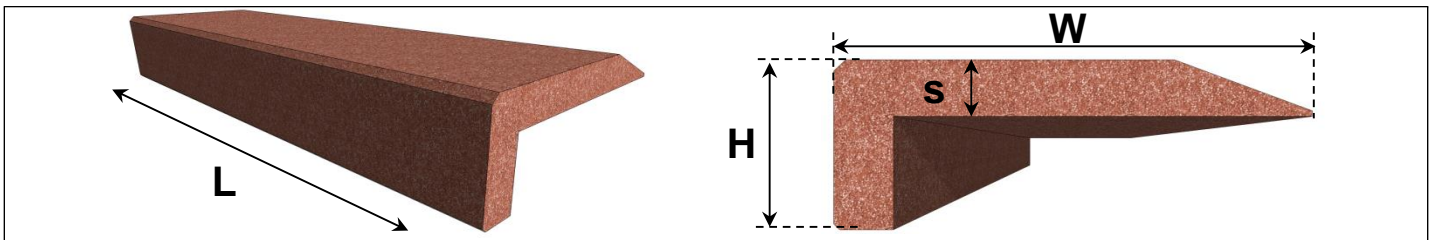

PHYSICAL CHARACTERISTICS	Norm	Unit	Bordo a "L"	Tolerance
Thickness		mm	<b>50</b>	± 1,5%
Length		mm	<b>1000</b>	± 1,5%
Height (H)		mm	<b>150</b>	± 1,5%
Width (W)		mm	<b>400</b>	± 1,5%
Weight per piece		kg	<b>18.3</b>	± 5%
Colour	<i>(colour tone can have variations among different units)</i>		<b>red - green - grey</b>	

PHYSICAL AND CHEMICAL PROPERTIES	Norm	Unit	Bordo a "L"	
Fire resistance	EN 13501-1		<b>Efl, E</b>	
Temperature tolerance			<b>- 40° C ; + 80° C</b>	

#### PACKING AND STORING

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to avoid possible water penetration.

#### WARNINGS

Make sure all the pieces have the same temperature during the entire installation period. Lay down the edges 24 hours before the installation to allow them to get their original dimensions.

Install all the edges in a single laying session in order to guarantee installation under similar conditions.

#### INFLUENCE FROM ATMOSPHERIC CONDITIONS

In order to get the idea application environmental conditions the temperature of the application site place have to be above 4°C for at least 24 hours before the pads application. If the site application has temperature below 4°C, please keep the pads stored for at least 72 hours before the installation at a temperature above 10°C.

Do not install the pads on sites where the temperature is below at 4°C for long time. The pads have to be stored and installed on shadow in order to avoid pads overheating.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved